




**Advanced Digital Message Signage (ADMS)
Single & Double Sided Full Color 3MM High
Definition LED Concourse Display**

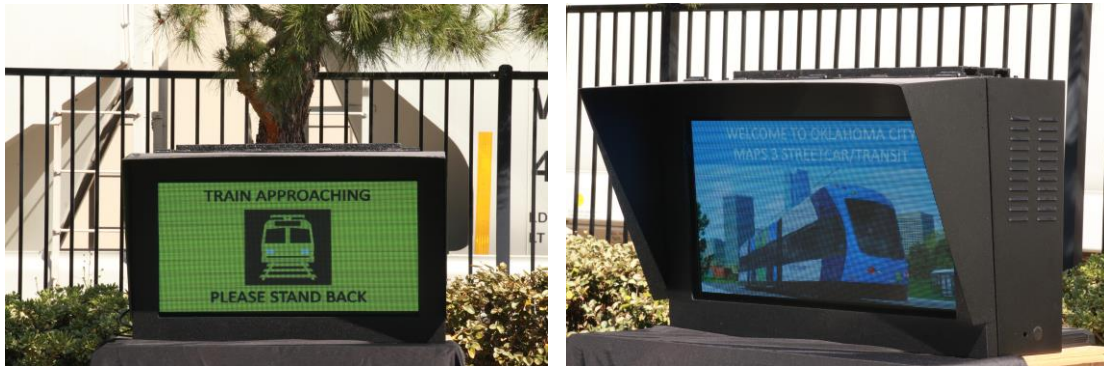

Specifications

Part Number:	TV-ADMS160-3SS (Single) / TV-ADMS170-3DS (Double)
Pixel Pitch & LED Type:	3mm / Outdoor Rated SMD
Lifetime:	100,000 HR Per Pixel
View Angle:	140° - Horizontal / 100° - Vertical
Display Colors:	4.4 Trillion
Refresh Rate:	2000 Khz
Screen Resolution:	Supports 720P High Defination
Viewable Image Size:	42"
Enclosure Dimensions:	45" X 14" X 27" (SS) 45" X 19" X 27" (DS)
Min Viewing Distance:	2 feet

Cabinet Material:	Aluminum (Anti-Graffiti Power Coated)
Brightness:	5000 Nits
LED Panel Type:	Indoor or Outdoor Direct Sunlight
Enclosure Panel Type:	Tempered Glass w/ Anti-Glare & Anti-Reflection
Cabinet Serviceability:	Front Opening Hinge
Net Weight:	120 lbs (Single Sided) 150 lbs (Double Sided)
Dimming:	Photocell Auto Sensing Dimming
Power Consumption:	850 Watts Max(single sided unit) 1700 Watts Max (double sided unit) *Typical Usage is 30% of Max *Advanced Control Circuitry Allows for Power Reduction for Solar Applications
Working Voltage:	100 - 120 V AC 60 Hz
Operating Temperature:	-12° - +145° F
Humidity:	10% - 95% RH
Cooling System:	Intake & Exhaust Fans
NEMA Rating:	NEMA 4 / IP 65
Data Interface:	Ethernet / HDMI
Warranty:	5-Year Limited Warranty

Ordering Information

Transitvue Communication Systems, Inc.



Phone: (909) 627-4100

www.transitvue.com

info@transitvue.com