


Advanced Digital Message Signage (ADMS) Single & Double Sided Full Color 3MM High Definition LED Platform Display

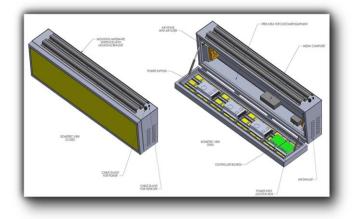

## **Specifications**

Part Number:	TV-ADMS260-P3-SS (Single)/TV-ADMS270-P3-DS (Double)
Pixel Pitch & LED Type:	3mm / Outdoor Rated SMD
Lifetime:	100,000 HR Per Pixel
Display Colors:	4.4 Trillion
Refresh Rate:	2000 Khz
Screen Resolution:	Supports 720P High Definition
Viewable Screen Size:	52.9134" - Horizontal / 7.5591" - Vertical
Enclosure Dimensions:	55.03" X 10.726" X 8.239" (Single Sided)
Brightness:	5000 NITS
LED Panel Type:	Indoor or Outdoor Direct Sunlight

August 2016

Enclosure Material:	Aluminum (Anti-Graffiti Power Coated)
Enclosure Panel Cover:	Double Coated Tempered Glass w/Anti-Glare & Anti- Reflection
Enclosure Serviceability:	Front Opening Hinges
Net Weight:	50lbs (Single Sided) 75lbs (Double Sided)
Dimming:	Photocell Auto Sensing Dimming
Power Consumption:	*480 Watts (single sided unit) 960 Watts (double sided unit) *Typical Usage in 30% of Max *Advanced Control Circuitry Allows for Power Reduction for Solar Applications
Working Voltage:	100 - 120 V AC 60 Hz
Operating Temperature:	-12° - +145° F
Humidity:	10% - 95% RH
Cooling System:	Intake and Exhaust Fans
NEMA Rating:	NEMA 4 / IP 65
Data Interface:	Ethernet / HDMI
Warranty:	5-Year Limited Warranty

## **Ordering Information**

Transitvue Communication Systems, Inc.



www.transitvue.com info@transitvue.com

August 2016